


NOTES

- TRIPLEX SOFTENER, METER INITIATED, DEMAND RECALL SYSTEM, UNITS BROUGHT ON LINE BASED ON FLOW-RATE.
- SOFTENER EQUIPPED WITH 1.25" TAIL FITTINGS WITH MAIN CONTROLLER.
- MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSI (690 kPa) AND MINIMUM INLET PRESSURE IS 40 PSI.
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 100 °F (38 °C). REQUIRES 120 VOLT, 1 PHASE, 60 Hz ELECTRICAL POWER.
- ALL EXTERNAL PIPING, FITTINGS, AND VALVES SHOWN BY BROKEN LINES ARE SUPPLIED BY OTHERS.
- MINERAL TANKS AND MEDIA ARE NSF APPROVED.
- DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. AS WELL AS BE PROTECTED FROM VACUUM. FLEX CONNECTORS AND A VACUUM BREAKER MAY BE REQUIRED. FAILURE TO INSTALL EITHER OF THEM OR IMPROPERLY INSTALL THEM MAY VOID THE WARRANTY.
- SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL, AND LOCAL CODES.
- FLOOR DRAINS MUST BE SIZED TO CARRY THE MAX. LISTED FLOW TO DRAIN.
- REFER TO THE INSTALLATION AND OPERATION MANUAL FOR FURTHER DETAILS.
- USE PROPER UNION OR FLANGE FOR THE PIPE CONNECTION TO VALVE FOR EASY MAINTENANCE.
- ALSO AVAILABLE IN 1" AND 1.5" PIPING CONNECTION.

FLOW RATE PER UNIT

| Model (Triplex) | Capacity | | Resin | | Salt Usage | | Critical Flow | 95 - 1.25" | | | Dimensions | | Drain Pipe Size | Installation | | | Shipping Weight | Operating Weight |
|--------------------|------------------------|------------------------|-----------------|----------------|------------------------|------------------------|------------------|------------|----------|----------|--------------|------------|--------------------|--------------|-------|-------|--------------------|---------------------|
| | @6 lbs/ft ³ | 10 lbs/ft ³ | ft ³ | m ³ | @6 lbs/ft ³ | 10 lbs/ft ³ | | @ 15 PSI | @ 25 PSI | To Drain | Mineral Tank | Brine Tank | | Height | Depth | width | | |
| | 10 lbs/ft ³ | 10 lbs/ft ³ | ft ³ | m ³ | lbs | kg | USGPM | USGPM | USGPM | in | in | in | in | in | in | in | lbs | lbs |
| 95MTS | 66000 | | 3 | | 18 | 30 | 15 | 25 | 35 | 5 | 14 x 65 | 24 x 37 | 1" | 77 | 30 | 141 | 885 | 4,485 |
| 90-1.25" | 81000 | | 0.08 | | 8.18 | 13.64 | 0.95 | 1.58 | 2.21 | 0.32 | 356 x 1651 | 610 x 940 | 25 | 1,956 | 762 | 3,581 | 402 | 2,035 |
| 95MTS | 88000 | | 4 | | 24 | 40 | 20 | 27 | 38 | 7 | 16 x 65 | 24 x 37 | 1" | 77 | 30 | 147 | 1,155 | 5,055 |
| 120-1.25" | 108000 | | 0.11 | | 10.91 | 18.18 | 1.26 | 1.70 | 2.40 | 0.44 | 403 x 1651 | 610 x 940 | 25 | 1,956 | 762 | 3,734 | 524 | 2,294 |
| 95MTS | 110000 | | 5 | | 30 | 50 | 25 | 32 | 43 | 8 | 18 x 65 | 24 x 37 | 1" | 77 | 30 | 153 | 1,434 | 5,634 |
| 150-1.25" | 135000 | | 0.14 | | 13.64 | 22.73 | 1.58 | 2.02 | 2.71 | 0.51 | 475 x 1651 | 610 x 940 | 25 | 1,956 | 762 | 3,886 | 651 | 2,556 |
| 95MTS | 132000 | | 6 | | 36 | 60 | 30 | 31 | 42 | 11 | 21 x 62 | 29 x 50 | 1" | 80 | 35 | 177 | 1,695 | 7,995 |
| 180-1.25" | 162000 | | 0.17 | | 16.36 | 27.27 | 1.89 | 1.96 | 2.65 | 0.69 | 533 x 1575 | 740 x 1275 | 25 | 2,032 | 889 | 4,496 | 769 | 3,627 |
| 95MTS | 154000 | | 7 | | 42 | 70 | 31 | 31 | 42 | 11 | 21 x 62 | 29 x 50 | 1" | 80 | 35 | 177 | 1,854 | 8,154 |
| 210-1.25" | 189000 | | 0.20 | | 19.09 | 31.82 | 1.96 | 1.96 | 2.65 | 0.69 | 533 x 1575 | 740 x 1275 | 25 | 2,032 | 889 | 4,496 | 841 | 3,700 |
| 95MTS | 176000 | | 8 | | 48 | 80 | 32 | 32 | 44 | 17 | 24 x 72 | 29 x 50 | 1" | 88 | 35 | 186 | 2,073 | 9,273 |
| 240-1.25" | 216000 | | 0.23 | | 21.82 | 36.36 | 2.02 | 2.02 | 2.78 | 1.07 | 610 x 1829 | 740 x 1275 | 25 | 2,235 | 889 | 4,724 | 941 | 4,207 |
| 95MTS | 198000 | | 9 | | 54 | 90 | 32 | 32 | 44 | 17 | 24 x 72 | 33 x 53 | 1" | 88 | 39 | 198 | 2,268 | 10,968 |
| 270-1.25" | 243000 | | 0.25 | | 24.55 | 40.91 | 2.02 | 2.02 | 2.78 | 1.07 | 610 x 1829 | 840 x 1335 | 25 | 2,235 | 991 | 5,029 | 1,029 | 4,976 |
| 95MTS | 220000 | | 10 | | 60 | 100 | 32 | 32 | 43 | 17 | 24 x 72 | 33 x 53 | 1" | 88 | 39 | 198 | 2,427 | 11,127 |
| 300-1.25" | 270000 | | 0.28 | | 27.27 | 45.45 | 2.02 | 2.02 | 2.71 | 1.07 | 610 x 1829 | 840 x 1335 | 25 | 2,235 | 991 | 5,029 | 1,101 | 5,049 |
| 95MTS | 242000 | | 11 | | 66 | 110 | 31 | 31 | 42 | 17 | 24 x 72 | 33 x 53 | 1" | 88 | 39 | 198 | 2,586 | 11,286 |
| 330-1.25" | 297000 | | 0.31 | | 30.00 | 50.00 | 1.96 | 1.96 | 2.65 | 1.07 | 610 x 1829 | 840 x 1335 | 25 | 2,235 | 991 | 5,029 | 1,173 | 5,121 |

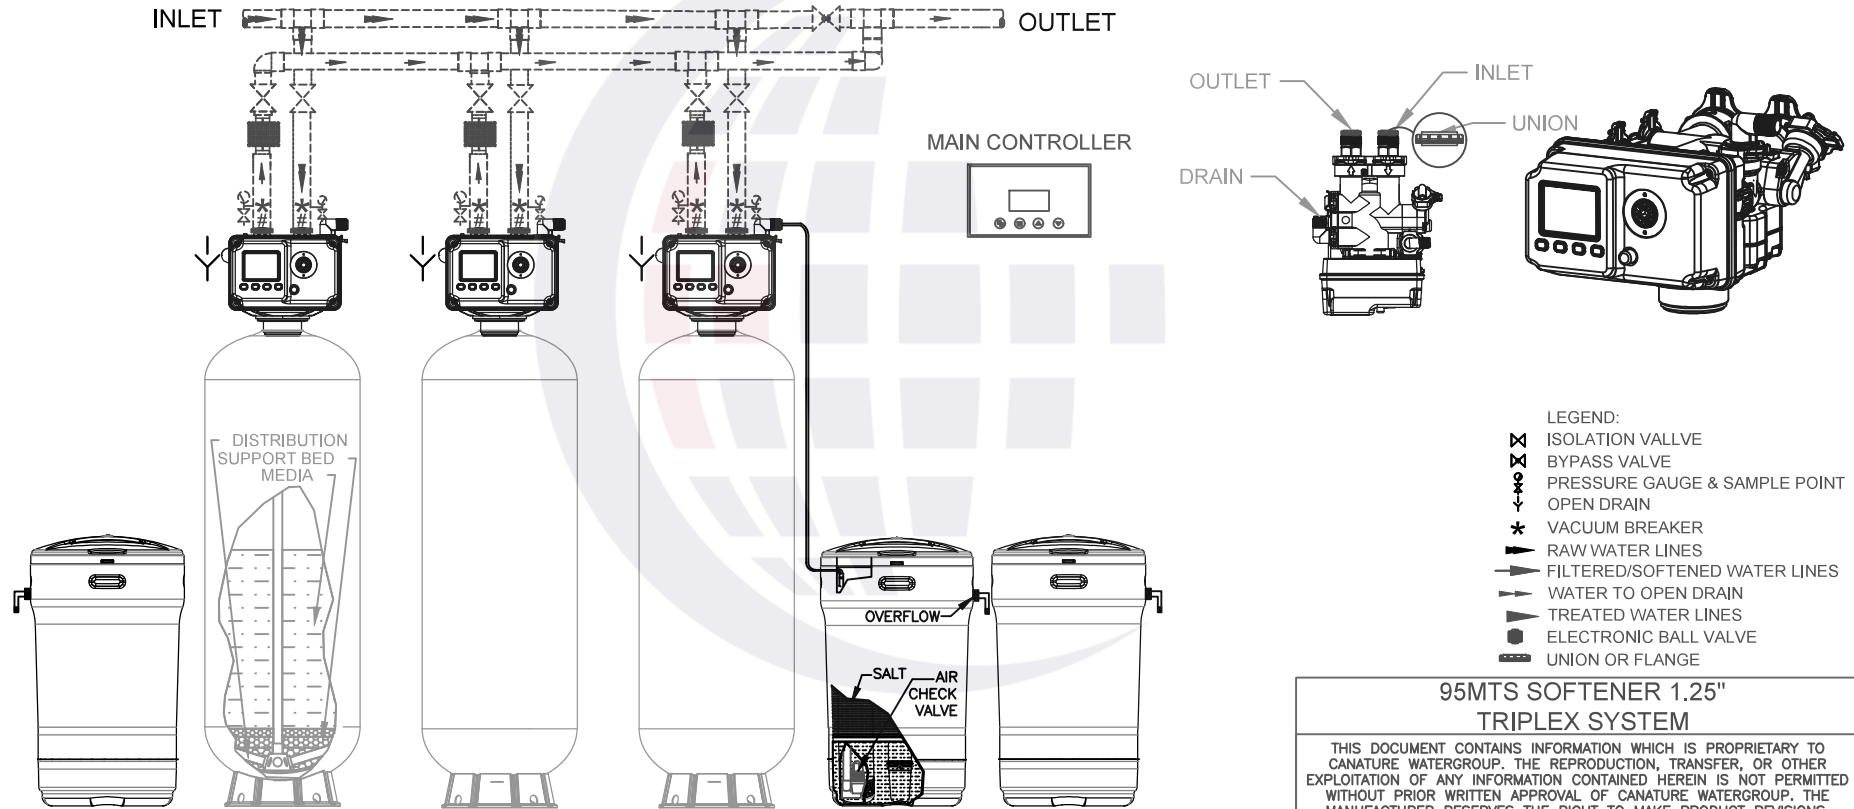

RAW WATER REGENERATION PIPING SHOWN



95MTS SOFTENER 1.25" TRIPLEX SYSTEM

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS, WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED PRODUCTS OR TO NOTE THE CHANGE.

Project _____ Date 10-26-2017 Rev 0
Dwg # 95MTS1.25T